


**Models 72916**  
**4mm Banana Jack to 2mm Banana Jack Adapter**

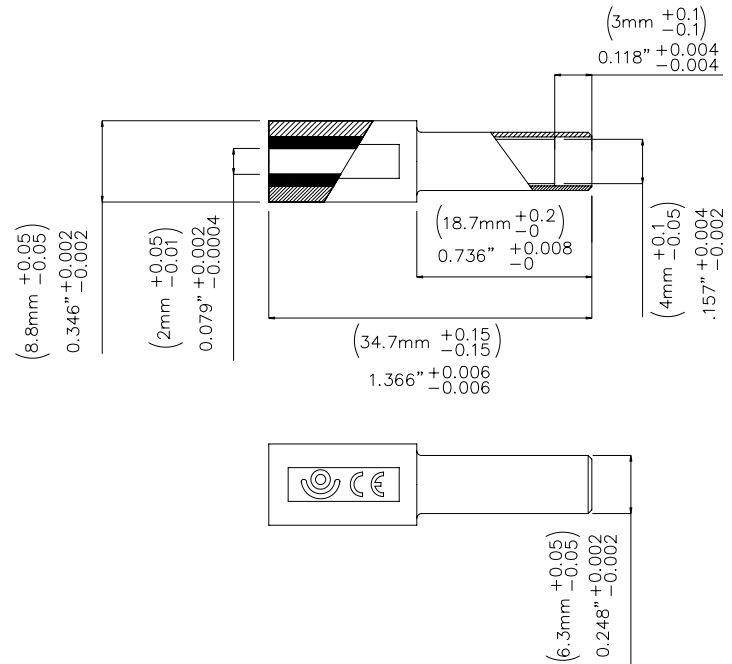

**Features**

- 4mm banana jack to 2mm banana jack adapter
- Adapts 2mm to 4mm safety-sheathed banana plugs
- Rating: 33 Vac / 70 Vdc, 10A

**Materials**

- Insulation: Polyamide
- Plug body: Nickel plated Brass

**Ordering Information**

Model:72916- Color Sold in packages of 10 pieces  
Available colors: Black (-0) or Red (-2)

**Specifications**

|                |                   |
|----------------|-------------------|
| Max Current    | Max. 10A          |
| Max Voltage    | 33 V AC / 70 V DC |
| Temperature    | -20° C + 80° C    |
| Max Resistance | Less than 0 .8 mΩ |

**Rating:** *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for hand-held use at voltages above 33Vrms/70Vdc

**USA:** Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.